



BY PRO-JECT AUDIO SYSTEMS

# INSTRUCTIONS FOR USE Pro-Ject Bluetooth Box E

Dear music lover,

thank you for purchasing a Pro-Ject Audio Systems Bluetooth Box E.

In order to achieve maximum performance and reliability you should study these instructions for use carefully.



Warning of a hazard for the user, the unit or possible misuse.



Important notice.

## Safety instructions

AC outlet voltages vary from country to country. Before connecting to the mains, make sure that the voltage in your area meets the voltage requirements printed on the power supply.




The power supply is used to disconnect the unit from the mains. Make sure that the power supply is easily accessible at all times. Never handle the device, the power supply while your hands are wet or damp.

Avoid letting liquids enter the device or the power supply. Never place any item containing liquid, such as a flower vase on or near the device. Never spill any liquid on the device or the power supply.

Never place any naked flame sources, such as lighted candles on or near the device. The product shall not be used in damp or wet locations, next to a bathtub, sink, swimming pool or any other similar conditions.

## Connectors

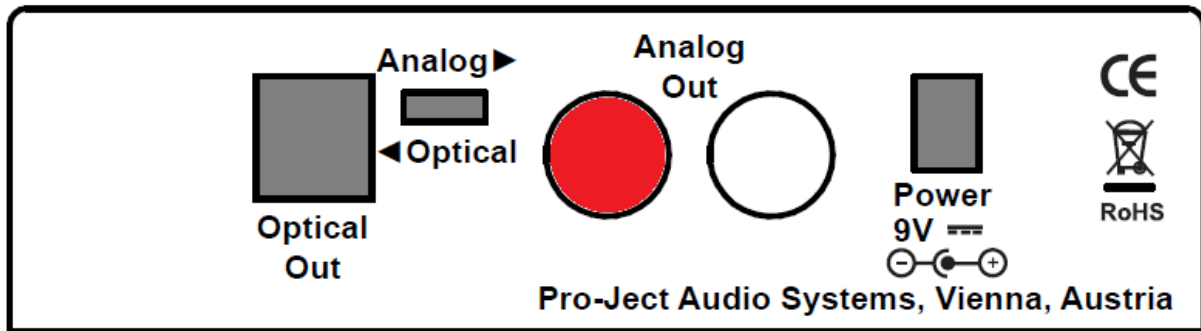

Make all connections whilst the product is disconnected from the power supply.



Take care to connect the left and right channels correctly. The right channel is usually marked red, the left channel black or white.

Never use any other power supply than the one supplied with the unit.

Never connect or disconnect power supply to or from the unit whilst the power supply is connected to the mains.

## Connection to the amplifier

Connect the **Analog Out** socket to a line input (such as **AUX**) on your amplifier. Alternatively you can use also digital **Optical Out** to connect the unit to a D/A converter or to digital input of your amplifier or AVR. Only one output is active at a time, use the small switch to select digital or analogue output.

## Mains power connection

Connect the low voltage plug from the power supply to the **Power 9V DC** socket before connecting the power supply to the mains.

## Bluetooth pairing

Pairing with devices with Android OS

Open **Settings** and tap on **Bluetooth**. Turn on Bluetooth and tap on **Scan**. Searched devices will show up. Tap on **"BT Box E"** (Confirm pairing code if requested). Once paired it will show "Connected to media Audio", now you can play music from your Android device over Bluetooth to Bluetooth Box E.

Pairing with Apple devices

Tap on **Settings**, tap on **Bluetooth**, turn on Bluetooth, your device will automatically start searching for available devices. Tap on **"BT Box E"** and it will be connected to the Bluetooth Box E. Now you can play music.



*It's possible to use Bluetooth Box E also with other than above mentioned devices, pairing procedure is always similar.*

Reconnecting

If you move out of range or turn off Bluetooth, Bluetooth Box E will disconnect from your device. To reconnect simply open the Bluetooth manager and tap on "BT Box E". If the signal is lost for only a few seconds it can reconnect automatically - typically if you move out of the range and then return back.

Adding a new phone or tablet

The unit can play music from one device at a time, but it is capable of being paired to up to 8 devices. If you want to switch from one device to another, you have to disconnect existing connection to Bluetooth Box E and then follow the steps for pairing with new device.

## Troubleshooting

No music from speakers:

- make sure the Bluetooth Box E is powered
- make sure an audio cable or an optical cable is correctly connected to Bluetooth Box E
- make sure you are within the range
- make sure the Bluetooth is enabled and the device is connected to Bluetooth Box E. Volume level is properly set

## Technical specifications Pro-Ject Bluetooth Box E

Effective range of wireless signal	up to 10m in case of direct visibility
Line-level output:	1 x RCA/Cinch
Output voltage:	2Vrms
Digital outputs:	1 x optical (TOSlink®)
Bluetooth version:	2.1 + EDR
Supported codecs:	aptX, SBC, A2DP Bluetooth profile
Outboard power supply:	9V/300mA DC
Power consumption:	100mA/9V DC, <1W in standby
Dimensions W x H x D (D with sockets):	120 x 32 x 100 mm
Weight:	250g without power supply

## Service

Should you encounter a problem which you are not able to alleviate or identify despite the above information, please contact your dealer for further advice. Only if the problem cannot be resolved there, the unit should be sent to the responsible distributor in your country.

## Warranty



*The manufacturer accepts no responsibility for damage caused by not adhering to these instructions for use. Modification or changes to any part of the product by unauthorized persons release the manufacturer from any liability over and above the lawful rights of the customer.*

## Copyright, trademarks

Pro-Ject Audio Systems is a Registered Trademark of H. Lichtenegger.  
This guide was produced by: Pro-Ject Audio Systems  
Copyright © 2014. All rights reserved.

The information was correct at the time of going to press. The manufacturer reserves the right to make changes to the technical specification without prior notice as deemed necessary to uphold the ongoing process of technical development.

TOSlink® is a registered trademark of Toshiba Corporation.